

## **Coating Systems** Decorative

## SURFACE PREPARATION මතුපිට සකස් කිරීම / வெளிப் புறத்திற்கு பூசும் போது



- Ensure that surfaces are clean, dry and stable.
- 🔞 මතුපිට සම්පූර්ණයෙන්ම වියළිව හා පිරිසිදුව තිබිය යුතුයි.
- 💆 வெளியிடங்கள் நன்றாய் உலர்ந்து மற்றும் சுத்தமாக இருக்க வேண்டும்.



- All unstable matter and loose paint film must be removed. Fill the cracks with
- 🖪 කලින් තීන්ත ආලේපිත මතුපිටක් නම් ගැලවී ගිය තින්ත කොටස් හා ලිහිල්ව බැඳී ඇති තීන්ත ස්තරයන් ඉවත් කරන්න. පැලීම් ආදිය ඇත්නම් Nippon Crack Filler යොදා සකසා ගන්න.
- 🗾 சில வேளை முன்னர் பெயிண்ட் செய்த சுவராயின் உரிந்துள்ள பெயிண்டின் துண்டுகளை அகற்றவும். Nippon Paint Crack Filler உடன் விரிசல்களை நிரப்பவும்



- Treat any areas of fungus growth with Nippon Paint Anti-Fungal Solution.
- 🖪 බිත්ති මතුපිට ඇල්ගි හෝ පුස් බැඳී ඇත්නම් Nippon Paint Anti-fungal Solution භාවිතා කර ඒවා ඉවත් කරන්න
- 💋 பூஞ்சணம் பிடித்த இடங்கள் இருப்பின் Nippon Paint Anti-Fungal Solution பாவித்து சுக்கம் செய்யவம்



- © Clean the surface till it is free from dust, grease, or any other contaminants
- 🗟 මතුපිට කුණුදූවිලි, තෙල්, ගීුස් වැනි දුවෳයන්ගෙන් තොර විය යුතුයි.
- 互 மேற்பரப்பு தூய்மையாகவும், உலர்வாகவும் உரிகள் அற்றதாகவும் காணப்பட



**NIPPOCOAT** 

JOINT

COMPOUND

| PREPARATION |      |
|-------------|------|
| COAT        |      |
|             | 1999 |

## SKIM COAT WHITE



# **FEATURES** Easy to use

- · Smooth finish Economical
- Surface preparation ensures that the new laye will adhere well, which improves the durability of the

- DRYING TIME AREA COVERAGE

- 4 Hours (Sandable) 24 Hours 10-15 Ft<sup>2</sup>/ Ka 1-1.4 m<sup>2</sup>/ Kg AVAILABILITY 20Kg 1.75kg,6kg,18kg,28kg

# 0005

Excellent

workability &

properties

· Dries without

adhesion to surfaces

Exceptional filling

sinking & cracking

· Easy to apply & sand



- - · Ready to use · Wide range of 3D
  - patterns & shapes Excellent mechanical properties

**TEXKOTE** 

TEXTURE

COATING

24 Hours

0.4-0.8 m<sup>2</sup>/ Kg

1L, 5L, 10L, 20L



USEFUL

**PRODUCTS** 

NIPPON PAINT

CRACK

NIPPON PAINT CRACK

Fibreglass reinforced

illing compound

Activopi Calcion

NIPPON ANTI-FUNGAL

Long-term protection



FEATURES

to prepare the wall surface

for better top coat adhesion.

DRYING TIME

AVAILABILITY

COAT

FEATURES

Topcoats are the final

finishing coats. They are

the desired appearance

decorative or protective

AREA COVERAGE

DRYING TIME

AVAILABILITY

(EXTERIOR)

FEATURES

inishing coats. They are

formulated to provide good

adhesion to the undercoa

the desired appearance

decorative or protective

AREA COVERAGE

AVAILABILITY

DRYING TIME

formulated to provide good

AREA COVERAGE

#### **EXPRESSKOTE** ALKALI RESISTANT PRIMER

• Excellent effloresce &

· Minimizes the occurrence

saving & labour saving

1 Hours

11 m<sup>2</sup>/ litre (30 µ DFT)

1L, 5L, 10L, 20L

**MEDIFRESH** 

3IN1

Anti-bacterial paint

Excellent Washability

Excellent Water

Resistance

and Mercury

Non Toxic. No Lead

Excellent Water Proofing

2 Hours

6 m<sup>2</sup>/ litre (70 µ DFT)

1L, 5L, 10L, 20L

· Covers Hairline Cracks

alkali resistance

of hairline cracks

· Cost effective. Time

Prevents chalking





· Covers hairline cracks

temperature fluctuations

3 Hours

8 m<sup>2</sup>/ litre (35 µ DFT)

1L, 4L, 10L, 20L

**EASY WASH** 

Premium Washable Paint

Repels Stains And

• Resists Fungus Growth

Covers Hairline Cracks

2 Hours

13 m<sup>2</sup>/ litre (30 µ DFT)

1L, 5L, 10L, 20L

WEATHERBOND

**ADVANCE** 

Blocks Dirt

Low Odour

Excellent honding

Good Elongation

properties on

Flexible

ELASTOMERIC

CRACK BRIDGING

WALL PRIMER



Outstanding alkaline

· Anti-Fungus and algae

Excellent effloresce

2 hours

14 m<sup>2</sup>/ litre (30 µ DFT)

1L, 4L, 10L, 20L

ODOUR~LESS

**PAINT** 

Almost no paint odour

NIPPON PAINT

Almost No Paint Odour

2 Hours

15-17 m<sup>2</sup>/ litre (35 µ DFT)

1L, 5L, 10L, 20L

**AOUA-PROOF** 

**7IN1** 

Waterproofing Paint

Anti-Fungus

Washable

Low VOC

resistance

resistance

resistance

Easy Application

**VINILEX 2000** 

WALL SEALER





**ALKALI RESISTANT** 

PRIMER

· Excellent Alkali

Efflorescence

Easy Application

2 Hours

9-12 m<sup>2</sup>/ litre (35 µ DFT)

1L, 4L, 10L, 20L

**VINYL SILK** 

Luxurious Silky Shades

NIPPON PAINT

High Coverage

· Resists fungus growth

2 Hours

15-17 m²/ litre  $^{(35\,\mu\,DFT)}$ 

1L, 5L, 10L, 20L

DURAFRESH

S<sub>0</sub>L<sub>0</sub>

Excellent adhesion

Resistance

Resistance

Excellent



**ACRYLIC WALL** 

**FILLER** 

**EXTERIOR** 



Hides surface

imperfections

Fungus resistant

2-4 Hours

10-15 m<sup>2</sup>/ litre (35 µ DFT)

1L. 4L. 10L. 20L

VINILEX 5000

Low odour

· Long lasting colors

Resistence to alkali &

2 Hours

17-20 m<sup>2</sup>/ litre (30 µ DFT)

1L, 4L, 10L, 20L

NIPPON EXTERIOR

**EMULSION** 

· Good coverage

Easy to apply

funai





ACRYLIC WALL

FILLER







NIPPON EXTERIOR

SEALER

- · Alali resistance · Long-term protection
- 1 Hours 10-15 m<sup>2</sup>/ litre (35 µ DFT) 10-12 m<sup>2</sup>/ litre

1L, 4L, 10L, 20L 1L, 4L, 10L, 20L





2 Hours

12-15 m<sup>2</sup>/ litre (30 µ DFT)

1L, 4L, 10L, 20L


**BREEZE** 

WEATHERPROTECT

EXTERIOR EMULSION

hidina










## NTERIOR COATING SYSTEM - 03



Feature Paint Category. Acrylic-based, environmentally friendly materials. Easy application. Excellent washability, stain, fungus and alkali resistance.

Surface Prep. Nippon Skim Coat / Nippo Coat

Primer Coat Nippon Paint Acrylic Wall Filler

Surface Prep. Nippon Skim Coat / Nippo Coat

Primer Coat Nippon Paint Acrylic Wall Filler

Surface Prep. Nippon Skim Coat / Nippo Coat Nippon Paint Acrylic Wall Filler

r Nippon Vinilex 2000

Nippon Interior Emulsion @ Coats

or Nippon Vinilex 5000 @ Coats

Nippon MediFresh 3in1 @ Coats


Nippon Odourless Paint @ Coats

Economical grade emulsion for general areas. Cost-efficient application.

Nippon Paint Martex @ Coats

Nippon Breeze Interior 2 Coats

#### **INTERIOR COATING SYSTEM - 04**



Premium-grade, Acrylic-based paints, Medifresh 3in1 antibacterial paint for better hygiene and health. Covers existing and potential hairline cracks. Low VOC, Odourless paint has almost no paint odour during and after painting.





Anti-Algae and dirt

streaks protection

Excellent resistance

Anti-Carbonation

against fading of

colours

Formula to protect

2 Hours

9 m<sup>2</sup>/ litre (40 µ DFT)

1L, 5L, 10L, 20L

against dirt & peeling



Dirt pick up resistance

Heat Ban Technology

2 Hours

16-18 m<sup>2</sup>/ litre (40 µ DFT)

1L, 5L, 10L, 20L

Tough paint film

Low VOC

Anti-Algal &

Anti-Fungal





Waterproofing

Elastomeric

Water Repellent

Algae & fungi resistant

Covers hairline cracks

Dirt pickup resistant

Decorative & protective

4 Hours

6-8 m<sup>2</sup>/ litre (100 µ DFT)

1L, 4L, 10L, 20L





Technology

Low VOC

Dirt Pick-up Resistance

Heat Ban Technology

6 Hours

11 m<sup>2</sup>/ litre (40 µ DFT)

1L, 5L, 10L, 20L





Mid sheen emulsion

Excellent washability

& efflorescence

Does not contain

heavy metals

Remarkable resistance

to algae & fungal growth

2 Hours

16-18 m<sup>2</sup>/ litre (40 µ DFT)

1L, 4L, 10L, 20L

resistance





Excellent outdoor

durability











 Anti-carbonation property

Protects against fungal

and algae growth

16-18 m<sup>2</sup>/ litre (40 µ DFT) 1L, 5L, 10L, 20L 1L, 4L, 10L, 20L

(WEATHERPROOF)
















# Excellent filling properties







imperfections Fungus resistant

2-4 Hours

NIPPON INTERIOR

**EMULSION** 

NIPPOI PAINT

Low sheen finish

· Washable & fungi

• Excellent coverage

Fashionable colours

2 Hours


18-21 m<sup>2</sup>/ litre (40 µ DFT)

1L, 4L, 10L, 20L

NIPPON PAINT

WALKLEEN

resistant










NIPPON PAINT

Professiona **PAINTING** 

**SERVICE** 

THE TRUSTED **PAINTING** SERVICE

BY PROFESSIONALS



· Anti-fungus property

 Good coverage and Hiding

2 Hours

13 m<sup>2</sup>/ litre (30 µ DFT)

4L/ 2L

Coats

Roof & Ceiling

NIPPON PAINT

ANTI-MOULD CEILING WHITE

Formulated with anti-mould

against most species of mould.

NIPPON PAINT

NIPPON ROOFING PAINT

Durable anti-flaking water

resistant Roofing Paint with excellent color retention. Vithstands extremely harsh

tropical weather.

Surface Prep. Nippon Skim Coat / Nippo Coat Primer Coat Nippon Vinilex 2000 Nippon Paint Vinvl Silk @ Coats Top Coat

**INTERIOR COATING SYSTEM - 02** 

Interior

Coating Systems

**INTERIOR COATING SYSTEM - 01** 

Standard Quality low & mid sheen emulsion. It lasts for most internal walls. A smooth and gentle emulsion finish enhances the sophisticated image of all modern homes.

Surface


Primer Coat

Top Coat(s) 🔯

Surface


Primer Coa

Top Coat(s)

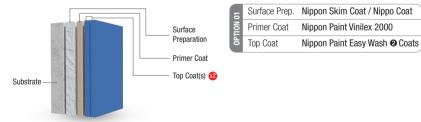


# Exterior

#### **EXTERIOR - 3 COATS SYSTEM - 01**

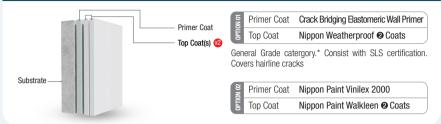


#### EXTERIOR - 3 COATS SYSTEM - 02

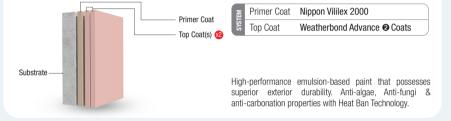


#### EXTERIOR - 3 COATS SYSTEM - 03



#### **EXTERIOR - 4 COATS SYSTEM - 01**

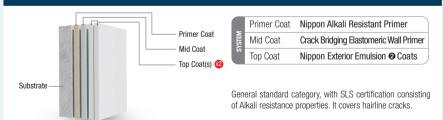

## EXTERIOR - 4 COATS SYSTEM - 02

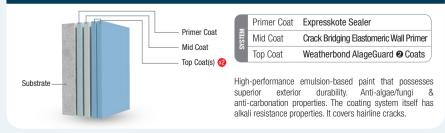

#### **EXTERIOR - 4 COATS SYSTEM - 03**




potential hairline cracks. Excellent waterproofing for vertical walls.

alkali resistance properties and covers hairline cracks.

properties and waterproofing ability. It covers hairline cracks.

itself has alkali resistance properties. It covers hairline cracks.

#### **EXTERIOR - 4 COATS SYSTEM - 04**

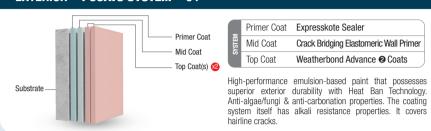

#### **EXTERIOR - 5 COATS SYSTEM - 01**




#### EXTERIOR - 5 COATS SYSTEM - 02



#### **EXTERIOR - 5 COATS SYSTEM - 03**



#### **EXTERIOR - 5 COATS SYSTEM (WITH TEXTURE COATING)**

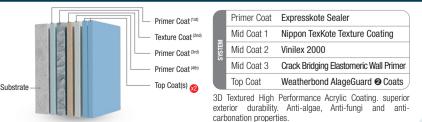

NIPPON Coating Systems
PAINT Decorative Decorative



weather resistant 100% acrylic polymer binder, suitable for

external & internal masonry & other building surfaces.

A: Roof & Gutters, B: Ceiling Paint, C: Wooden Ceiling, D: Interior Walls, E: Special Effects, F: Exterior Wooden Furnit G: Floor Coatings, H: Wooden Floors, I: Indoor Furniture, J: Exterior Walls, K: Waterproofing, L: Protective Coatings



#### **EXTERIOR STONE TEXTURE COAT - ROYAL STONE**



# Roof & Ceiling Coatings

#### **COATING SYSTEM FOR CEILING & SOFIT**



#### **COATING SYSTEM FOR ROOF**





#### NIPPON PAINT LANKA (PVT) LTD. No. 69A, Buthgamuwa Road, Rajagiriya, Sri Lanka.

Telephone: +94 11 4 600400. Fax: +94 11 4 600409 www.nipponpaint.lk



Interior & Exterior

# Coating Systems Decorative



A product of ISO 14001:2015 & ISO 9001:2015 certified company.











